

CPCI-CAN/400-CC


Driven by esdACC (Advanced CAN Core)

Basic Product Features:

- CAN ISO 11898-1 protocol compatibility
- 11-bit and 29-bit CAN IDs
- Bit rates from 10 kbit/s up to 1 Mbit/s supported
- Receive buffer (64 CAN messages)
- Complete access to CAN error counters
- Programmable error warning limit
- Error code capture register
- Error interrupt for each CAN bus error
- Arbitration lost interrupt with detailed bit position
- Single-shot transmission (no re-transmission)
- Listen only mode (no acknowledge, no active error flags)
- Automatic bit rate detection (software supported bit rate detection)
- Acceptance filter (4-byte code, 4-byte mask)
- Self reception mode (reception of 'own' messages)

Superior esdACC Features:

- Operating system independently programmable via esd's NTCAN-API
- 32-bit register interface optimized for CAN needs
 - Easy to program
 - Transmission and reception of CAN frames with a minimum of register accesses
- RX and TX timestamping (64-bit wide, bit accurate, resolution may vary with input clock, in any case ≤ 62.5 ns, usually 20.833 ns)
 - On hardware with IRIG-B interfaces IRIG-B time is used for timestamping
- TX FIFO (8 CAN frames deep)
 - Providing the means to generate 100% busload even with non-realtime operating systems
 - Providing the means for real back-to-back transmission
- Frame accurate abortion of transmissions with minimum delay
 - e.g. for driver timeouts
 - ISO11898-1 conform
 - Aborted frames in FIFO won't be blocked by low priority TX
- Hardware timer to provide accurate software timeouts beyond operating system accuracy
- Bus mastering in RX direction takes the load off host CPU (needs bus master capable local bus to host interface)
- Optional integration with 32-bit microcontroller to further relieve host CPU
- Optional different sources for timestamps (e.g. IRIG-B)
- CAN error injection units
 - Simulating a wide range of error situations on CAN bus, e.g.:
 - ID pollution (100% bus load on certain CAN ID/priority)
 - Defective sensor (Destroying all CAN messages of a given CAN ID)
 - Different trigger modes
 - Bit pattern match
 - Time triggered
 - Immediate regarding CAN arbitration
 - External
 - 'Cross CAN bus triggering' (event on one CAN bus triggers event on another bus)
- Using FPGA technology provides the option to tailor any feature to any customer's needs, including optional integration with customer's FPGA content
- The esdACC IP core has been verified on Xilinx Spartan and Altera Cyclone FPGAs.

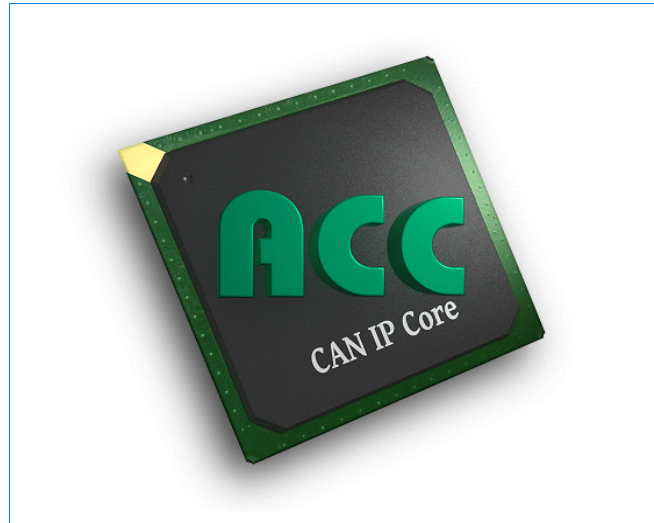

Driver Availability:

Windows, Linux¹, QNX¹, VxWorks¹, RTX¹

¹ For detailed information about the driver availability for your operating system and the particular esd CAN interface please contact our sales team.

Available Higher Level Protocols:

CANopen, ARINC825, J1939

For further information on the esdACC IP Core please contact our sales team.

Availability of the superior esdACC features depends on the operating system and the hardware. Please contact our sales team for further information.